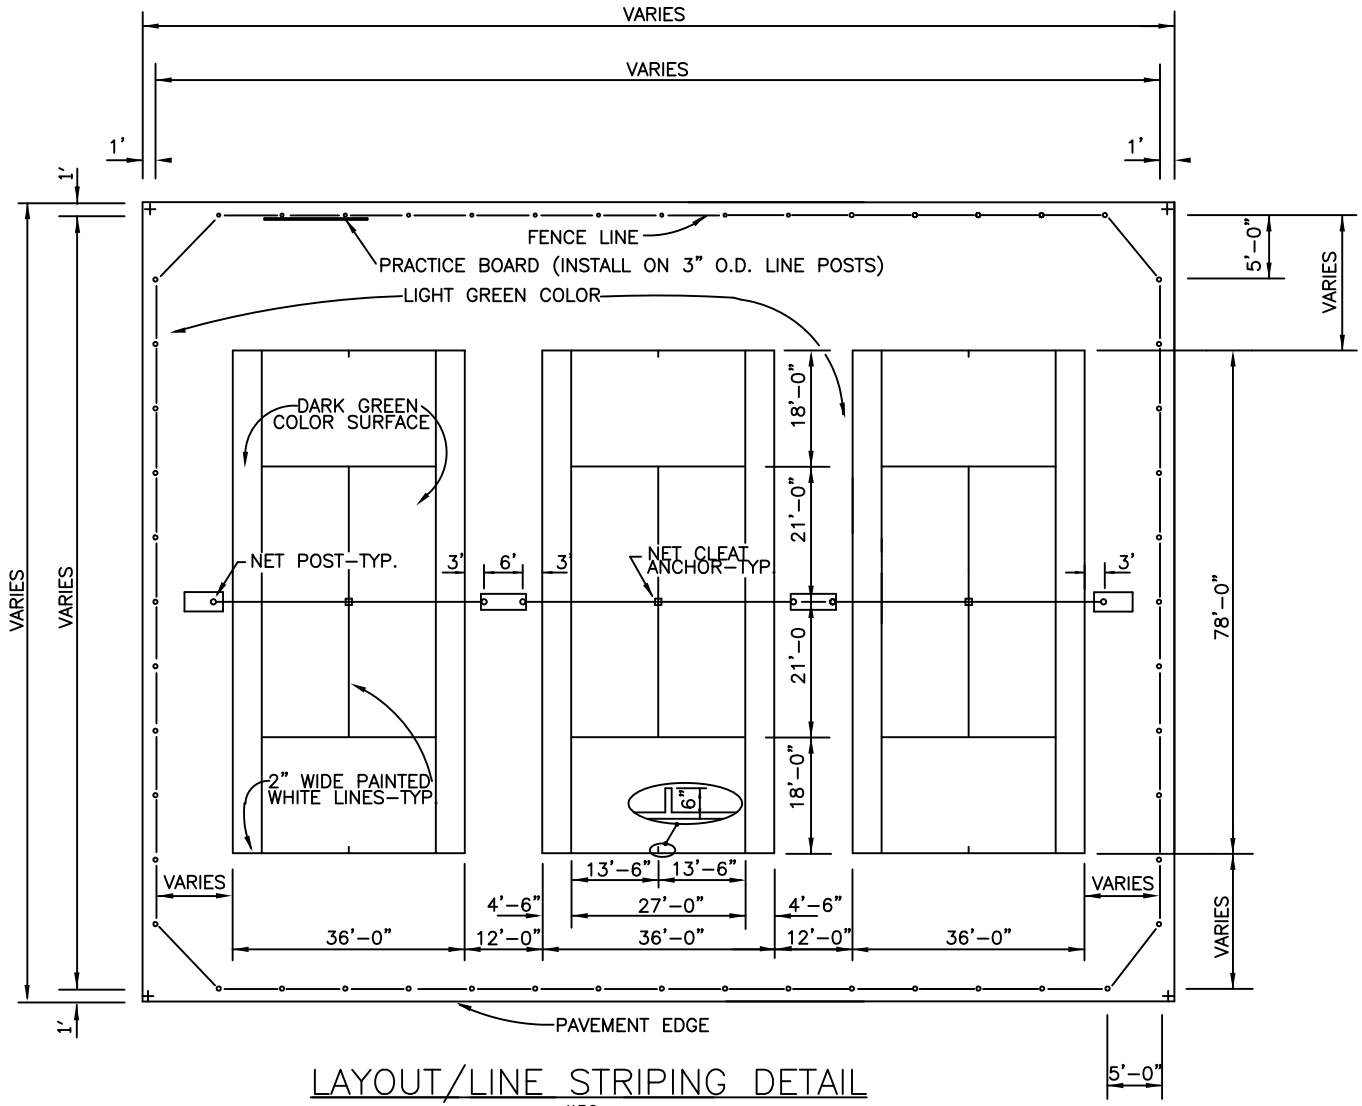

LAYOUT/LINE STRIPING DETAIL

N.T.S.

NOTES:

PROVIDE 1% SLOPE ACROSS COURT.

POINTS OF FINISH ELEVATIONS SHOWN ON SITE PLAN ARE NOTED BY "+".

GATES ARE TO BE LOCATED AS SHOWN ON SITE PLAN AND ARE TO SWING OUT.

APPLY PROTECTIVE COLORCOATING ON SMOOTH ASPHALT SURFACE AT MANUFACTURER'S RECOMMENDED RATE.

COLORCOAT SURFACE AFTER FENCE AND GATES HAVE BEEN INSTALLED. PROVIDE CHAIN AND LOCK FOR GATES TO PROTECT THE COLORCOATED SURFACE FROM POSSIBLE VANDALISM.

ALL MEASUREMENTS FOR LINE STRIPING OF COURTS ARE TO THE OUTSIDE OF LINES, EXCEPT THOSE INVOLVING THE CENTER SERVICE LINE WHICH IS EQUALLY DIVIDED BETWEEN LEFT AND RIGHT SERVICE COURTS.

PROVIDE AN 8' HIGH BY 16' WIDE PRACTICE BOARD MOUNTED ON THE FENCE AT THE END OF ONE COURT AS SHOWN, TO BE PAINTED GREEN WITH A WHITE NET LINE.

FOR PAVEMENT SECTION AND NET POST ANCHOR DETAILS, SEE STANDARD DETAIL 203.

FOR FENCE AND GATE DETAILS, SEE STANDARD DETAIL 204.

NOTE: "CALIFORNIA CORNERS" ARE TO BE USED FOR TENNIS COURT RENOVATION ONLY. FOR NEW TENNIS COURT CONSTRUCTION SEE STANDARD DETAIL 201.

THE MARYLAND-NATIONAL CAPITAL PARK AND PLANNING COMMISSION Department of Park and Planning, Montgomery County, Maryland	PARK DEVELOPMENT DIVISION 9500 BRUNETT AVENUE SILVER SPRING, MD 20901	DATE APPROVED CHIEF ENGINEER SUPERINTENDENT OF PARKS	TRIPLE TENNIS COURT	REVISED	DATE	STANDARD NO. 209